

SSC Series Salt Chlorinator

VARIOUS MODELS FOR DIFFERENT SIZE OF POOL
For residential and semi-commercial pools



Product Features

1. 3 models to choose: 15, 25, 45g/hr
2. Self cleaning reverse polarity
3. Quality titanium cells
4. Lighting transformer models
5. Maximum working pressure: 250kPa/36psi/2.5bar

 **Emaux**
water technology

Pool & Spa Equipment



Characteristics

Salt Chlorinators, are an alternative means of sanitizing your pool with chlorine using the process of electrolysis. The electrolysis process is achieved by passing the salt water solution through an electrolytic cell which converts sodium chloride (salt) in the water into chlorine gas which, when dissolved in water become sodium hypochlorite (liquid chlorine).

Safe and respecting the environment, this technology brings you:

- Relaxation: Your pool is automatically disinfected
- Safety: Reduction in chlorine storage and handling
- Comfort: Clean, safe and crystal-clear water
- Health and well-being: Therapeutic, saltwater does not irritate eyes and dry out skin




Cell

Control Unit

Technical Information

| Code 220V/50Hz | Model | Description | Salt Level (ppm) | Cell Output (gram/h) | Fiberglass Pool(L) | Concrete Pool(L) | Pool Light Voltage | Input Voltage /Freq | IP Rating | Weight (kg) |
|-------------------|-----------|---|---------------------|-------------------------|-----------------------|---------------------|-----------------------|------------------------|--------------|----------------|
| 88380601 | SSC15-E | Standard Version | 4000 | 15 | 50,000 | 45,000 | N/A | 240V 50/60Hz | IPX4 | 6.5 |
| 88380602 | SSC25-E | | | 25 | 75,000 | 70,000 | | | | 7.4 |
| 88380603 | SSC50-E | | | 45 | 120,000 | 110,000 | | | | 9.7 |
| 88380401 | SSC15-T | With Time Clock | 4000 | 15 | 50,000 | 45,000 | N/A | 240V 50/60Hz | IPX4 | 6.6 |
| 88380402 | SSC25-T | | | 25 | 75,000 | 70,000 | | | | 7.5 |
| 88380403 | SSC50-T | | | 45 | 120,000 | 110,000 | | | | 9.8 |
| 88380201 | SSC15-TLT | With Time Clock & Pool Light Transformer | 4000 | 15 | 50,000 | 45,000 | 12V AC | 240V 50/60Hz | IPX4 | 8.4 |
| 88380202 | SSC25-TLT | | | 25 | 75,000 | 70,000 | | | | 8.8 |

Installation Diagram

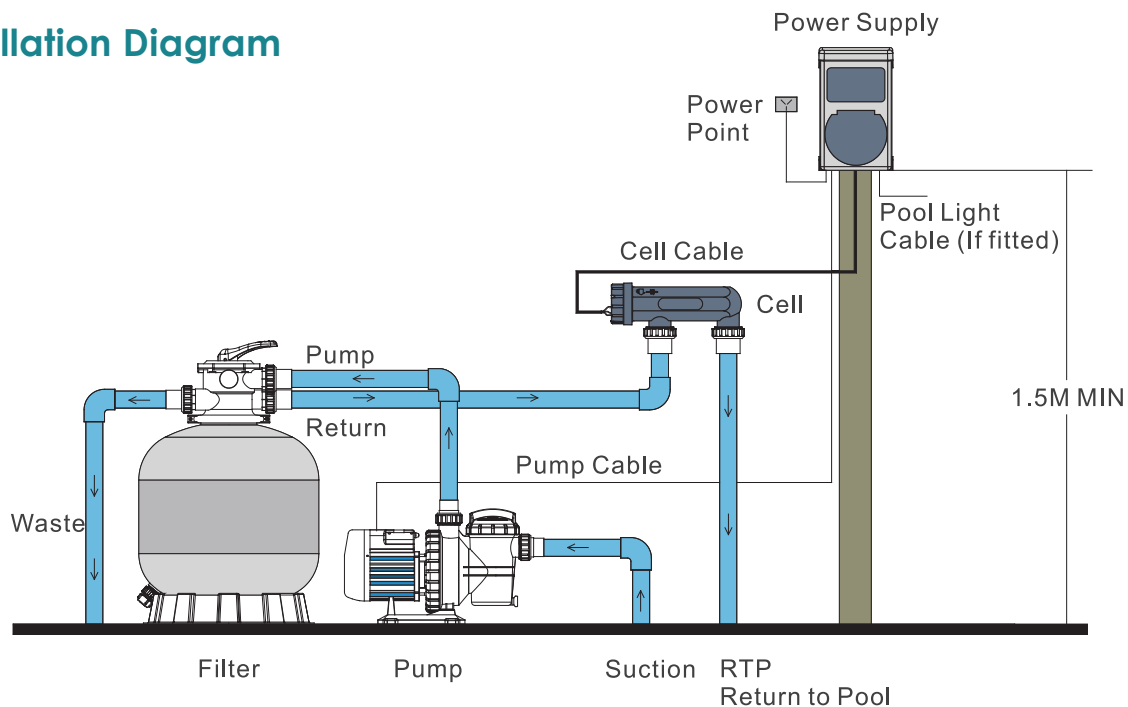

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS G/F 41 TIN HAU TEMPLE ROAD,
NORTH POINT, HONG KONG
PHONE +852 2832 9880
www.emaugroup.com

Pool & Spa Equipment

Available from:

STRIVE FOR CLEAR WATER

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
© 2018 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.